

PHYSICAL DESCRIPTION

- 4-6-8-12 fibers armored outdoor aerial figure 8 fiber optic cable,
- Thixotropic jelly filled loose tube,
- Swellable glass yarn as strength member,
- Central loose tube design,
- Corrugated steel armor,
- Outer jacket is made of medium density polyethylene ,
- Ripcord is inserted for easy jackets removal.

DESCRIPTION

Fiber Type	SM & MM Fibers
Tube Material	PBT (Polybutylene Terephthalate)
Color of Loose Tube	Natural
Color of Fibers in Per Tube	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Tube Filling Compound	Thixotropic jelly
Strength Elements	Swellable glass yarns
Ripcord	Aramid cord
Identification Tape Marking	As a customer request
Inner jacket	-
Armor	Corrugated steel tape
Outer Jacket	Black MDPE, thickness nominal 1.5±0.1 mm
Web	Height: 2.5±0.5 mm Width: 2.5±0.5 mm
Messenger Wire	Steel; 7x0.92 mm
Identification tape marking	As a customer request
Surface Marking	As a customer request

Fiber Count	Tube Outer/Inner Diameter(mm)	Cable Diameter(mm)	Cable Weight(kg/km)
4	3.0/2.0*	17.0/8.7*	145*
6	3.0/2.0*	17.0/8.7*	145*
8	3.0/2.0*	17.0/8.7*	145*
12	3.0/2.0*	17.0/8.7*	145*

*:Tolerance is ±10%

Mechanical and Environmental Properties

Physical tests	Value	Standart
Tensile Strength	2000 N	IEC 60794-1-E1
Impact Resistance	10J, 3 impacts	IEC 60794-1-E4
Crush Resistance	220 N/cm	IEC 60794-1-E3
Temperature Cycling	-40 to +70 °C	IEC 60794-1-F1
Bend Radius (during installation)	20x cable diameter	IEC 60794-1-E11
Bend Radius (during Service)	10x cable diameter	IEC 60794-1-E11
Repeating Bending	20xcable diameter between	IEC 60794-1-E6
Operation Temperature	-40 to +70 C	
Storage and Transportation Temperature	-40 to +70 C	
Installation Temperature	-30 to +60 C	

STANDART SM FIBER ITU-T G 652 D

PROPERTIES	SPECIFIED Value
Attenuation (max)	0.40 dB/km (1310 nm) 0.25 dB/km (1550 nm)
MFD	9.2±0.4 µm (1310 nm) 10.4±0.5 µm (1550 nm)
Chromatic Dispersion (max)	3.5 ps/(nmxkm)(1310 nm) 18 ps/(nmxkm)(1550 nm)
Cladding diameter	125 ± 0.3 µm
Core/Clad Concentricity error	≤ 0.5 µm
Zero dispersion wavelength	1300nm ≤ ≤1324nm
Cladding non-circularity	≤ 0.7 %
Coating diameter	245 ± 10 µm
Cut Off Wavelength	≤ 1260nm
Proof Test	≥ 1% (100kpsi or 0.7GPa)

STANDARD SM FIBER ITU-T G 657 A

PROPERTIES	SPECIFIED Value
Attenuation (max)	0.40 dB/km (1310 nm) 0.25 dB/km (1550 nm)
MFD	9.0±0.4 µm (1310 nm) 10.1±0.5 µm (1550 nm)
Cladding diameter	125±0.7µm
Core/Clad Concentricity error (max)	0.5 µm
Zero dispersion wavelength	1300nm ≤ ≤1324nm
Cladding non-circularity (max)	% 0.7
Coating diameter	242±7 µm
Cut Off Wavelength	≤1260nm
Proof Tensile Test	≥ 1% (100kpsi or 0.7GPa)
Macro bending Attenuation : (10 turn on a 15 mm radius mandrel)	≤ 0.25 dB @1550 nm

SM FIBER ITU-T G 657 A2 Bend İnsensitive

PROPERTIES	SPECIFIED Value
Attenuation (max)	0.35 dB/km (1310 nm) 0.22 dB/km (1550 nm)
MFD	8.6 ± 0.4 μm (1310 nm)
Cladding diameter	125 ± 0.7μm
Core/Clad Concentricity error (max)	0.5 μm
Zero dispersion wavelength	1302nm ≤ ≤1322nm
Cladding non-circularity (max)	% 1
Coating diameter	240 ± 5 μm
Cut Off Wavelength	≤ 1260nm
Proof Tensile Test	≥ 1% (100kpsi or 0.7GPa)
Macro bending Attenuation : (1 turn on a 7.5 mm radius mandrel)	≤ 0.5 dB @1550 nm

NON-ZERO DISPERSION SHIFTED SM FIBER ITU-T G 655

PROPERTIES	SPECIFIED Value
Attenuation (max)	0.25 dB/km (1550 nm)
MFD	9.6 ± 0.4 μm (1550 nm)
Chromatic Dispersion at 1530–1565 nm	2.0–6.0 ps/(nmxkm)nm)
Chromatic Dispersion at 1565–1625 nm	2.0–6.0 ps/(nmxkm)
Cladding diameter	125 ± 0.7 μm
Core/Clad Concentricity error (max)	0.6 μm
Cladding non-circularity (max)	% 0.7
Coating diameter	245 ± 5 nm
Cut Off Wavelength	≤ 1450nm
Proof Test	≥ 1% (100kpsi or 0.7GPa)

62.5/125 μm MM OM1 OPTICAL FIBER

PROPERTIES	SPECIFIED Value
Attenuation (max)	3.5 dB/km (850 nm) 1.5 dB/km (1300 nm)
Bandwidth (min)	200 MHz.km(850 nm) 600 MHz.km(1300 nm)
Numerical Aparature	0.275±0.015
Core Diameter	62.5 ± 2 μm
Cladding Diameter	125 ± 1μm
Core/Clad Concentricity error	≤ 1 μm
Cladding non-circularity	≤ 0.7 %
Coating Diameter	242 ± 5 μm
Proof Test	≥ 100kpsi or 0.7GPa

50/125 µm MM OM2 OPTICAL FIBER

PROPERTIES	SPECIFIED Value
Attenuation (max)	3.5 dB/km (850 nm) 1.5 dB/km (1300 nm)
Bandwidth (min)	700 MHz.km(850 nm) 500 MHz.km(1300 nm)
Numerical Aparature	0.200±0.015
Core Diameter	50 ± 2 µm
Cladding Diameter	125 ± 1µm
Core/Clad Concentricity error	≤ 1 µm
Cladding non-circularity	≤ 0.7 %
Coating Diameter	242 ± 5 µm
Proof Test	≥ 100kpsi or 0.7GPa


50/125 µm MM OM3 OPTICAL FIBER

PROPERTIES	SPECIFIED Value
Attenuation (max)	3.5 dB/km (850 nm) 1.5 dB/km (1300 nm)
Bandwidth (Laser EMB)	2000 MHz.km(850 nm) 500 MHz.km(1300 nm)
Bandwidth (Overfilled)	1500 MHz.km(850 nm) 500 MHz.km(1300 nm)
Numerical Aparature	0.200±0.015
Core Diameter	50 ± 2 µm
Cladding Diameter	125 ± 1µm
Core/Clad Concentricity error	≤ 1 µm
Cladding non-circularity	≤ 0.7 %
Coating Diameter	242 ± 5 µm
Proof Test	≥ 100kpsi or 0.7GPa


50/125 µm MM OM4 OPTICAL FIBER

PROPERTIES	SPECIFIED Value
Attenuation (max)	3.0 dB/km 1.0 dB/km
Bandwidth (Laser EMB)	4700 MHz.km(850 nm) 500 MHz.km(1300 nm)
Bandwidth (Overfilled)	3500 MHz.km(850 nm) 500 MHz.km(1300 nm)
Numerical Aparature	0.2±0.015
Core Diameter	50 ± 3µm
Cladding Diameter	125 ± 3µm
Core/Clad Concentricity error	≤ 1 µm
Cladding non-circularity	≤ 0.7 %
Coating Diameter	242 ± 5 µm
Proof Test	≥ 100kpsi or 0.7GPa


4 fibers Cable Cross Section

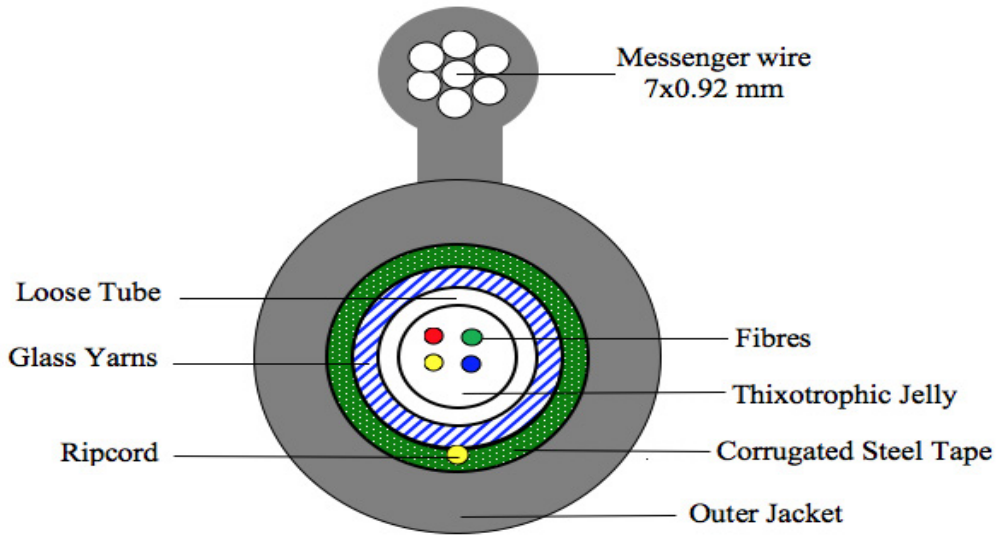

6 fibers Cable Cross Section

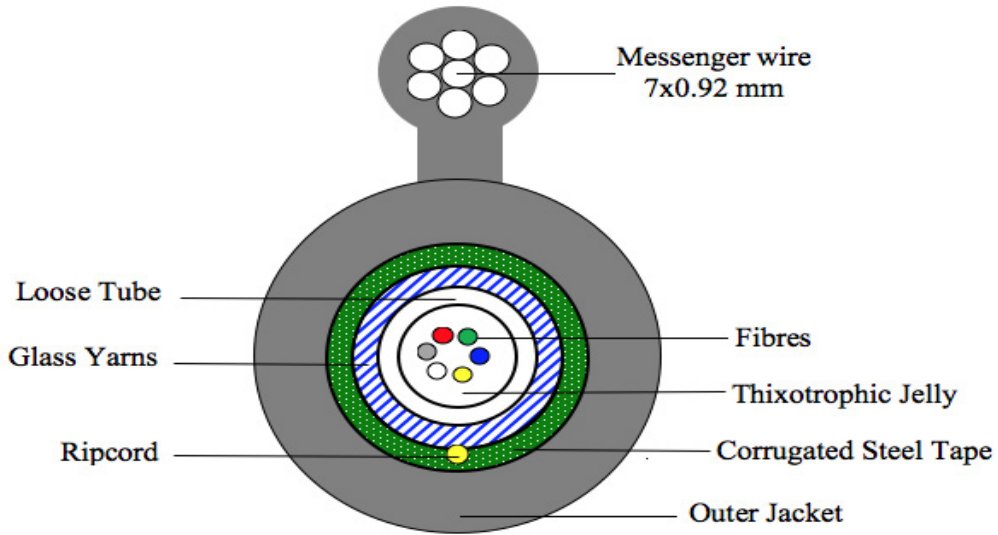

8 fibers Cable Cross Section

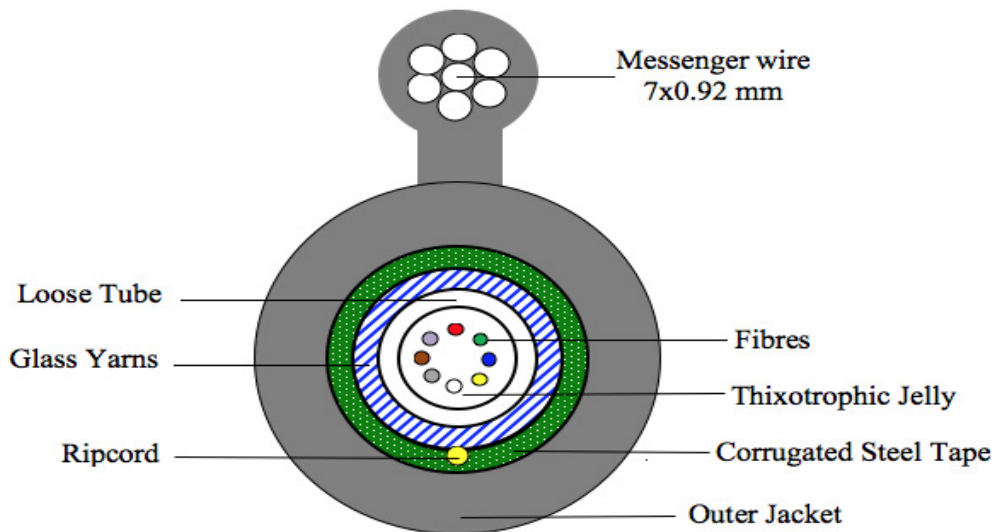

12 fibers Cable Cross Section

